

AQ-F255V Feeder Protection Device



Description

AQ-F255V offers a modular feeder protection and control solution for applications that require a large I/O capacity. It also includes the automatic voltage regulator (AVR) function with independent and parallel tap control modes, as well as the transformer module with its protections. You can add up to eleven (11) I/O or communication modules into the device for extensive monitoring and control applications. AQ-F255V communicates using various protocols, including communication according to the IEC 61850 standard.

Highlights:

- Double busbar control.
- A large I/O capacity.
- Automatic voltage regulator (independent and parallel tap control modes).
- Transformer module with its protection functions.
- Cable-end differential protection.
- Low-impedance restricted earth fault protection.
- Harmonics protection and control.
- A 5-shot scheme-controlled auto-recloser.
- Optional power and energy measurement accuracy of up to 0.2 %.

See all AQ-F255 variants

Technical data

PROTECTION

- Non-directional overcurrent ($I_{>}$; 50/51) - 4 stages
- Non-directional earth fault ($I_{O>}$; 50N/51N) - 4 stages
- Directional overcurrent ($I_{dir>}$; 67) - 4 stages
- Directional earth fault ($I_{Odir>}$; 67N/32N) - 4 stages
- Intermittent earth fault ($I_{Oint>}$; 67NT)
- Negative sequence overcurrent/ Phase current reversal/ Current unbalance ($I_{2>}$; 46/46R/46L) - 4 stages
- Harmonic overcurrent ($I_{h>}$; 50H/51H/68H) - 4 stages
- Circuit breaker failure protection (CBFP; 50BF/52BF)
- High-impedance or low-impedance restricted earth fault/ Cable end differential ($I_{Od>}$; 87N)
- Overvoltage ($U_{>}$; 59) - 4 stages
- Undervoltage ($U_{<}$; 27) - 4 stages
- Neutral overvoltage ($U_{O>}$; 59N) - 4 stages
- Sequence voltage ($U_{1/U2>}<$; 47/27P/59PN) - 4 stages
- Overfrequency and underfrequency ($f_{>}<$; 81O/81U) - 8 stages
- Rate-of-change of frequency ($df/dt_{>}<$; 81R) - 8 stages
- Load shedding (81LSH)
- Low-voltage ride-through (LVRT; 27T)
- Voltage-restrained overcurrent ($I_{v>}$; 51V)
- Power protection (P, Q, S $_{>}<$; 32) - 4 stages
- Transformer status monitoring
- Transformer thermal overload ($TT_{>}$; 49T)
- Volts-per-hertz overexcitation ($V/Hz_{>}$; 24)
- Underimpedance ($Z_{<}$; 21U)
- Underreactance ($X_{<}$; 21/40)
- Line thermal overload ($TF_{>}$; 49F)
- Resistance temperature detectors (RTD)
- Programmable stage ($PS_{x>}<$; 99)
- Arc protection ($I_{Arc>}/I_{OArc>}$; 50Arc/50NArc) (optional)

CONTROL

- Number of objects to control and monitor: 10
- Number of indicators to monitor: 10
- Number of setting groups: 8
- Cold load pick-up (CLPU)
- Switch-on-to-fault (SOTF)
- Auto-recloser (0 → 1; 79)
- Zero sequence recloser (U0> RECL; 79N)
- Automatic voltage regulator – parallel control (AVR; 90)
- Vector jump ($\Delta\phi$; 78)
- Synchrocheck ($\Delta V/\Delta a/\Delta f$; 25)

MONITORING

- Current transformer supervision
- Voltage transformer supervision (VTS; 60)
- Total harmonic distortion (current)
- Total harmonic distortion (voltage)
- Fault locator (21FL)
- Measurement recorder
- Measurement value recorder
- Event recorder (max. 15,000 permanent event records)
- Disturbance recorder (max. 100 records á 5 seconds at 3.2 kHz sampling)

MEASUREMENTS

- Phase, sequence and residual currents (IL1, IL2, IL3, I01, I02)
- Phase, sequence and residual voltages (UL1, UL2, UL3, UL12, UL23, UL31, U0)
- Frequency (f)
- Power (P, Q, S, pf) and Energy (E+, E-, Eq+, Eq-)
- Power and energy measurement accuracy of 0.5 %
- Power and energy measurement accuracy of up to 0.2 % (optional)

HARDWARE

Standard hardware

- Current inputs: 5
- Voltage inputs: 4
- Digital inputs: 3
- Digital outputs: 5
- Number of empty slots: 11

Optional hardware modules

- Digital input module (8 x DI)
- Digital output module (5 x DO)
- High-speed high-current output module (3 x out)
- Milliampere input module (4 x mA in, 1 x mA out)
- Milliampere output module (4 x mA out, 1 x mA in)
- RTD input module (8 RTD inputs)
- Arc protection module (4 x channels, 2 x HSO, 1 x BI)
- Communication media (see "Communication" below)
- External I/O modules (see "Accessories" below)

COMMUNICATION

Standard communication ports

- RJ-45 100 Mbps Ethernet (front panel)
- RJ-45 100 Mbps Ethernet and RS-485 (rear panel)

Optional communication modules

- Double RJ-45 Ethernet & IRIG-B communication module
- Double ST Ethernet & IRIG-B communication module
- Double SFP Ethernet & IRIG-B communication module
- Double LC (HSR/PRP) Ethernet communication module
- Double RJ-45 (HSR/PRP) Ethernet communication module
- RS-232 & serial fiber communication module


Communication protocols

- IEC 61850 (edition 1)
- IEC 61850 (edition 2)
- IEC 60870-5-101/104
- IEC 60870-5-103
- Modbus/RTU and Modbus/TCP
- DNP3
- SPA


ACCESSORIES

- AX007 External 6-channel 2-/3-wire RTD input module (pre-configured)
- AX008 External 8-channel thermocouple and mA input module (pre-configured)
- AX013 Raising frame (120 mm)
- AX014 Raising frame (40 mm)
- AX015 Wall mounting bracket
- AX020 SFP module (2 km, MM)
- AX021 SFP module (40 km, SM)
- AX022 SFP module (120 km, SM)


Application Drawing

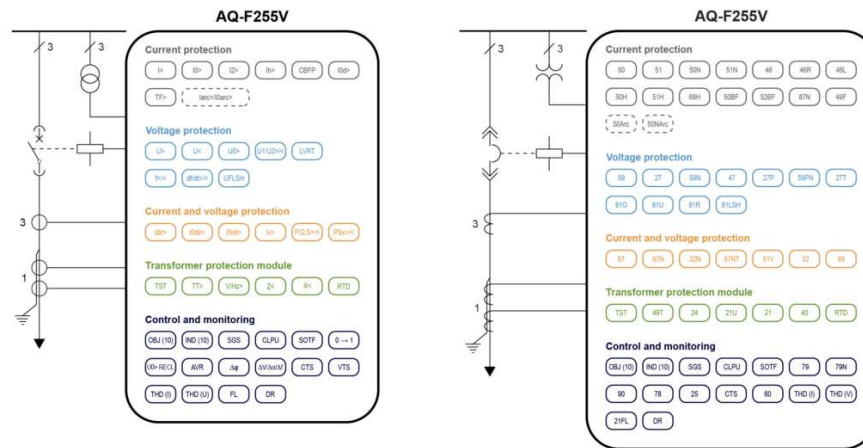

Device Rear Image

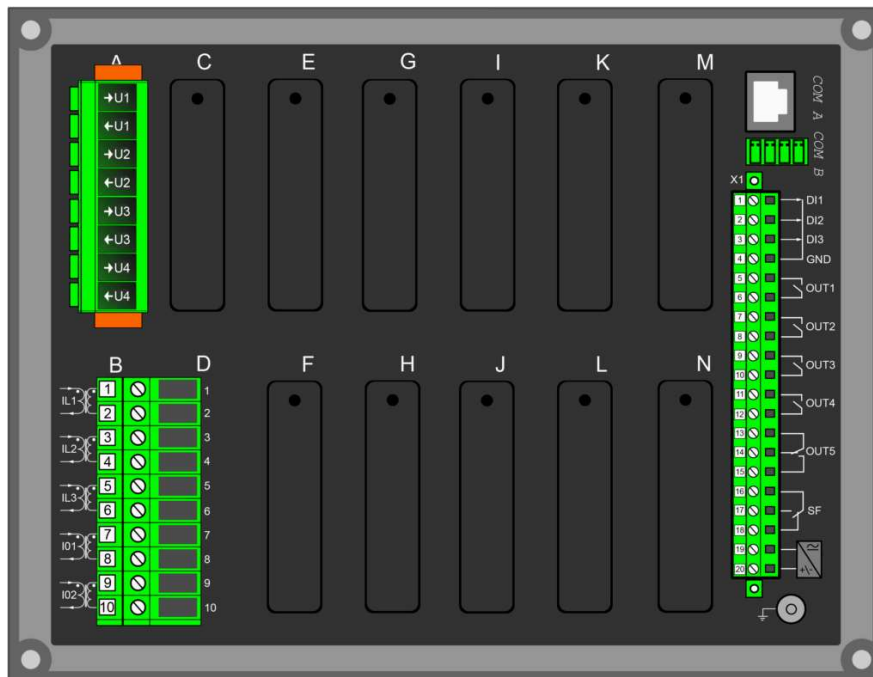

Device and Cut-out Image

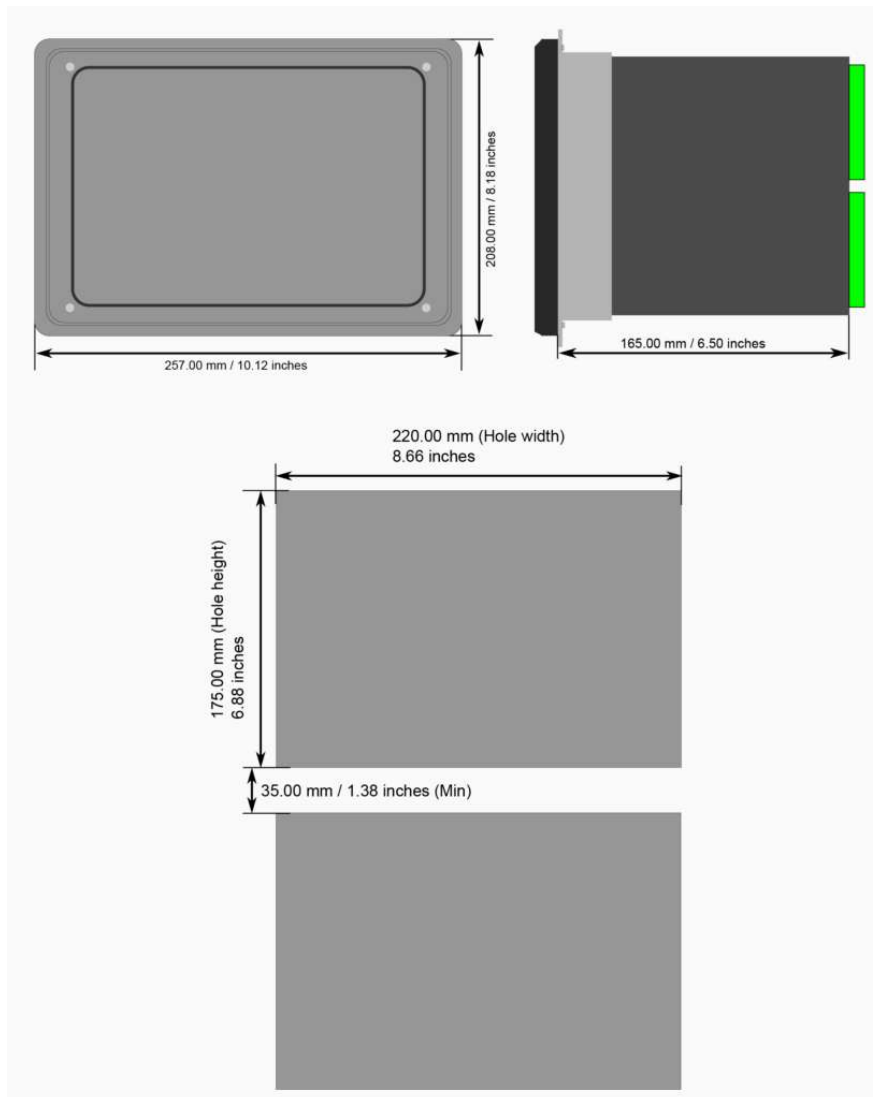

Order Code

	AQ - F 2 5 X - P X X X A X A - X X X X X X X X X X
Model	
F Feeder protection	
Device size	
5 1/2 of 19" rack	
Analogue measurement	
5 5 Current measurement channels and 4 voltage measurement channels	
Functionality package	
A Standard feeder protection package	
B Line differential protection package (no voltage measurements)	
C Line differential and standard feeder protection package	
D Distance and standard feeder protection package	
E Line differential, distance and standard feeder protection package	
R Standard feeder protection package + single pole breaker control	
S Standard feeder protection package + synchronizer function	
V Standard feeder protection package + AVR + transformer protection	
Mounting	
P Panel mounted	
Auxiliary voltage	
H 80...265 VAC/DC	
L 18...72 VDC	
Measurement accuracy	
0 Power/Energy measurement accuracy 0.5%	
2 Power/Energy measurement accuracy 0.2%	
Terminals	
A Standard	
B Ring-lug current terminals	
C Standard current terminals, spring cage voltage and I/O terminals	
D Ring-lug current terminals, spring cage voltage and I/O terminals	
Reserved for future use	
A N/A	
Digital inputs on power supply module	
A 3 Digital inputs, 24 V nominal threshold	
B 3 Digital inputs, 110 V nominal threshold	
C 3 Digital inputs, 220 V nominal threshold	
Reserved for future use	
A N/A	
Slots C, E, F, G, H, I, J, K, L, M, N (11 pcs)	
A Empty	
B 8 Digital inputs	
C 5 Output relays (max. 6 pcs)	
D Arc protection with 4 point sensor channels, 2 x HSO, 1 x BI (max. 1 pcs)	
F 8 x RTD input (max. 2 pcs)	
G 2 x RJ45 100Mb Ethernet & IIRIG-B (max. 1 pcs) *	
H 2 x ST 100Mb Ethernet & IIRIG-B (max. 1 pcs) *	
I 4 x mA outputs - 1 x mA input (max. 2 pcs)	
J Double LC 100Mb Ethernet (HSR, PRP redundant protocols) (max. 1 pcs) *	
K Double RJ45 100Mb Ethernet (HSR, PRP redundant protocols) (max. 1 pcs) *	
L RS-232 - Serial fiber (Plastic-Plastic) (max. 1 pcs) *	
M RS-232 - Serial fiber (Plastic-Glass) (max. 1 pcs) *	
N RS-232 - Serial fiber (Glass-Plastic) (max. 1 pcs) *	
O RS-232 - Serial fiber (Glass-Glass) (max. 1 pcs) *	
Q 2 x SFP 100Mb Ethernet & IIRIG-B (max. 4 pcs) **	
R 3 x High-speed high current output (max. 3 pcs)	
T 4 x mA inputs - 1 x mA output (max. 2 pcs)	

* Can only be applied to the two last slots.

** Can only be applied to the four last slots. Requires an SFP adapter. See "Accessories" list.